

NEW!



**TEST
WINNER**
PORTABLE HEATERS

Dagbladet
MARCH 2025

Provida Booster II H

The BOOSTER II H is the big brother of the BOOSTER II, and with a height of 66.5 cm, it provides rapid heat distribution throughout the room. Its sleek design fits perfectly in any space. Tip-over protection and overheat safety are standard. Mechanical thermostat for easy operation.



EXTREMELY FAST HEATING

Reaches maximum temperature in just 90 seconds



**INFRARED HEAT &
CONVECTION HEAT**
heat where you need it



ENERGY EFFICIENT & POWER SAVING

cost-effective heat



**MICATHERMIC HEATING
TECHNOLOGY**
new innovative technology




3-WAY HEAT DISTRIBUTION

emits heat to both sides and upwards



APPROVED FOR BATHROOMS

IP-rated: IP24

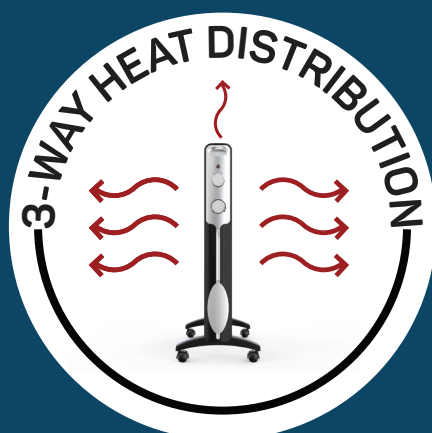


BOOSTER HEAT TEST

B ROOM SIZE: 22,3M²

B TESTS CONDUCTED OVER 3 HOURS

B 12 TEMPERATURE SENSORS

B 3 HEIGHTS: FLOOR, CEILING & SEATED HEIGHT

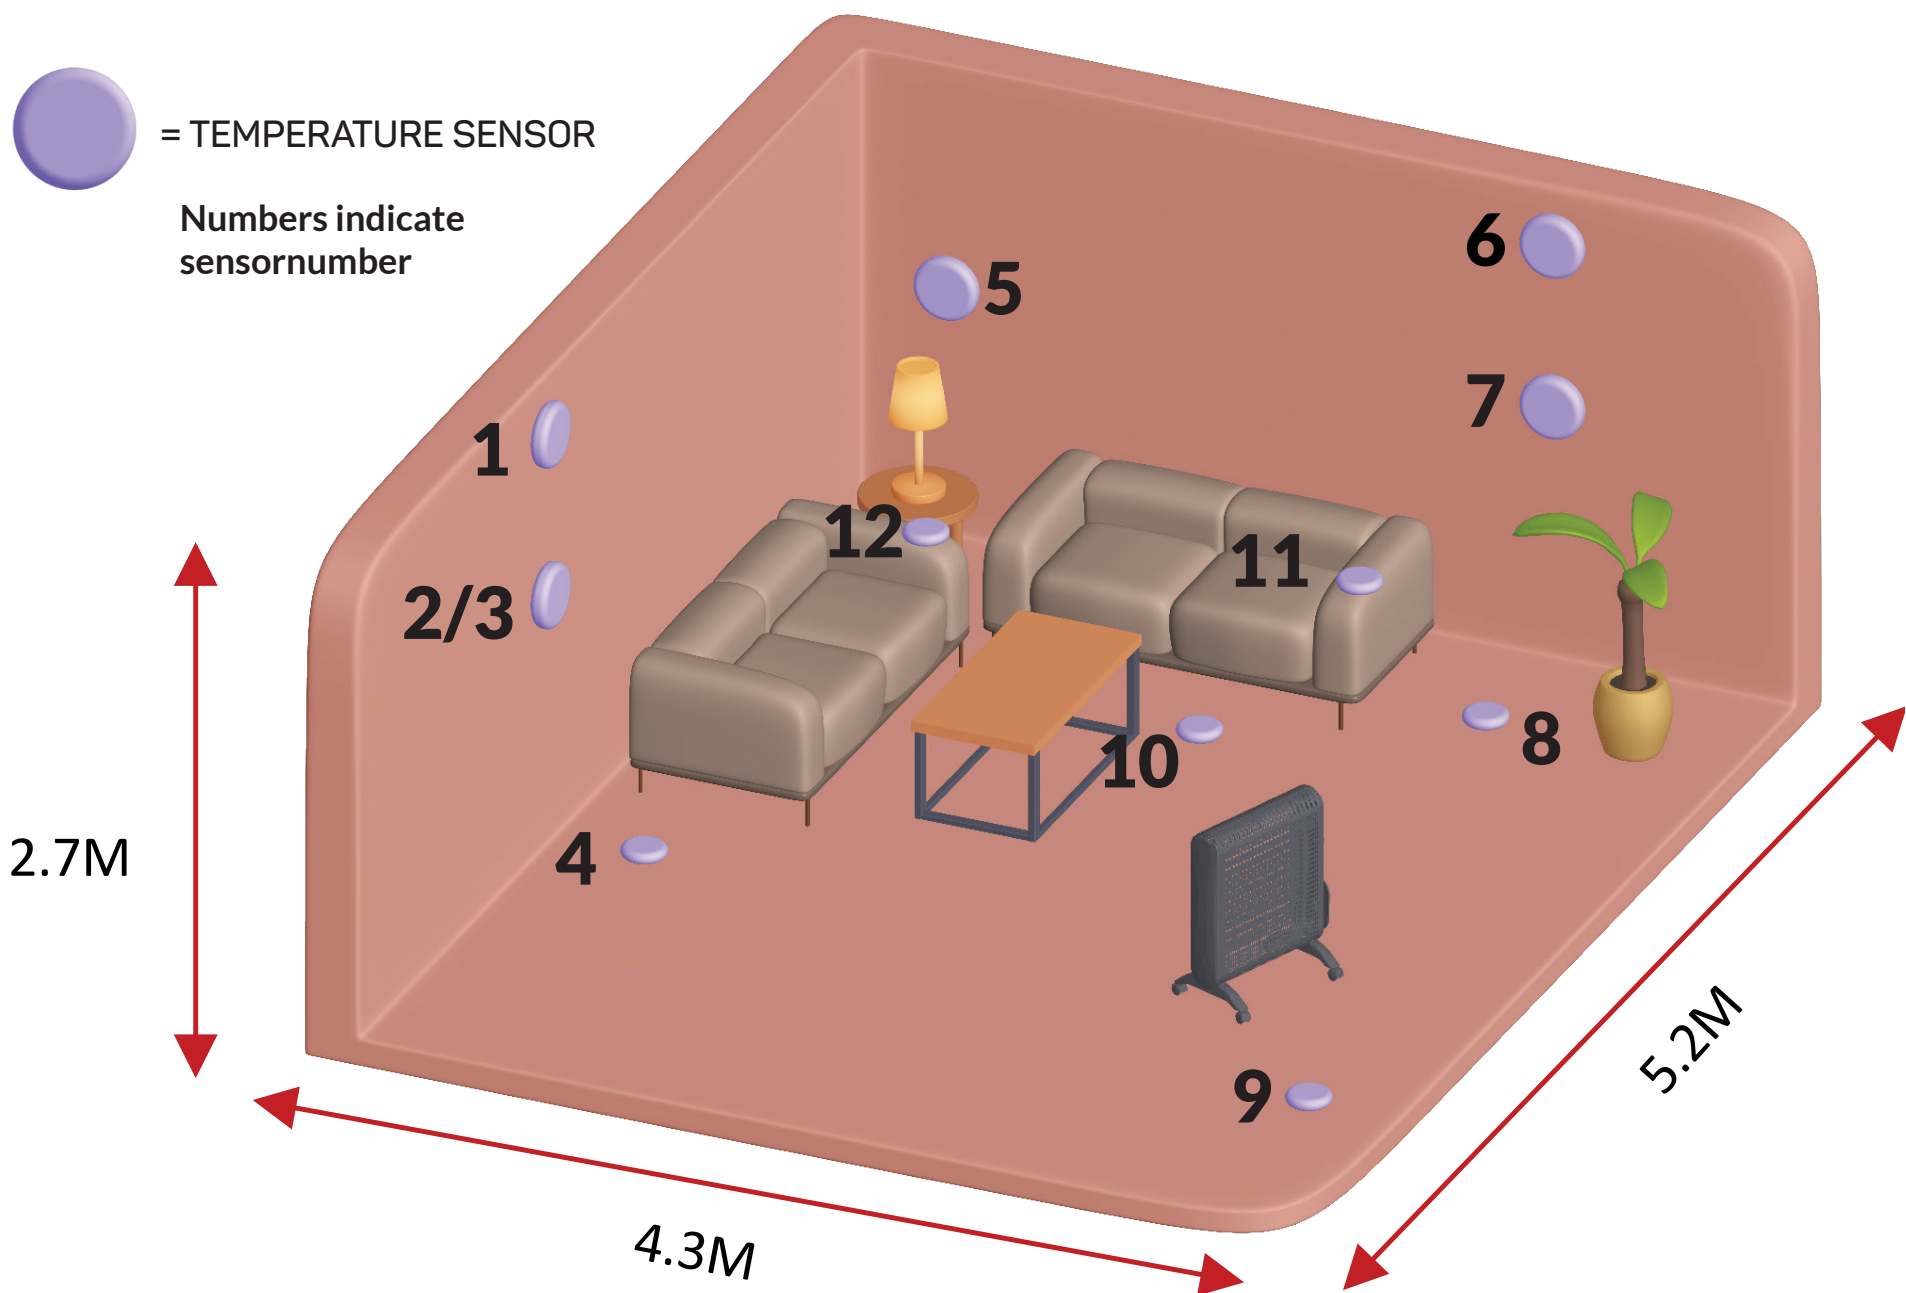

Test results

The numbers below show the temperature increase after 3 hours. The average of the measurement points for floor, seated height, and wall & ceiling has been used as the differential value.

MEASUREMENTS	OIL HEATER	FREESTANDING PANEL HEATER	BOOSTER II	BOOSTER II H
WALL & CEILING	5.4 °C	6.4 °C	9.5 °C	9.5 °C
FLOOR	3.6 °C	4.1 °C	6.7 °C	6.5 °C
SEATED HEIGHT	4.5 °C	5.7 °C	8.4 °C	8.6 °C