

Provida Booster II

The BOOSTER II is only 52.2 cm tall, yet delivers plenty of heat in a compact product. It's easy to place and takes up little space. Features built-in tip-over protection and overheat safety. Mechanical thermostat for simple operation



EXTREMELY FAST HEATING

Reaches maximum temperature in just 90 seconds



INFRARED HEAT & CONVECTION HEAT

heat where you need it



ENERGY EFFICIENT & POWER SAVING

cost-effective heat



MICATHERMIC HEATING TECHNOLOGY

new innovative technology



3-WAY HEAT DISTRIBUTION

emits heat to both sides and upwards



APPROVED FOR BATHROOMS

IP-rated: IP24




BOOSTER HEAT TEST

B ROOM SIZE: 22,3M²

3 TESTS CONDUCTED OVER 3 HOURS

3 12 TEMPERATURE SENSORS

3 HEIGHTS: FLOOR, CEILING & SEATED HEIGHT

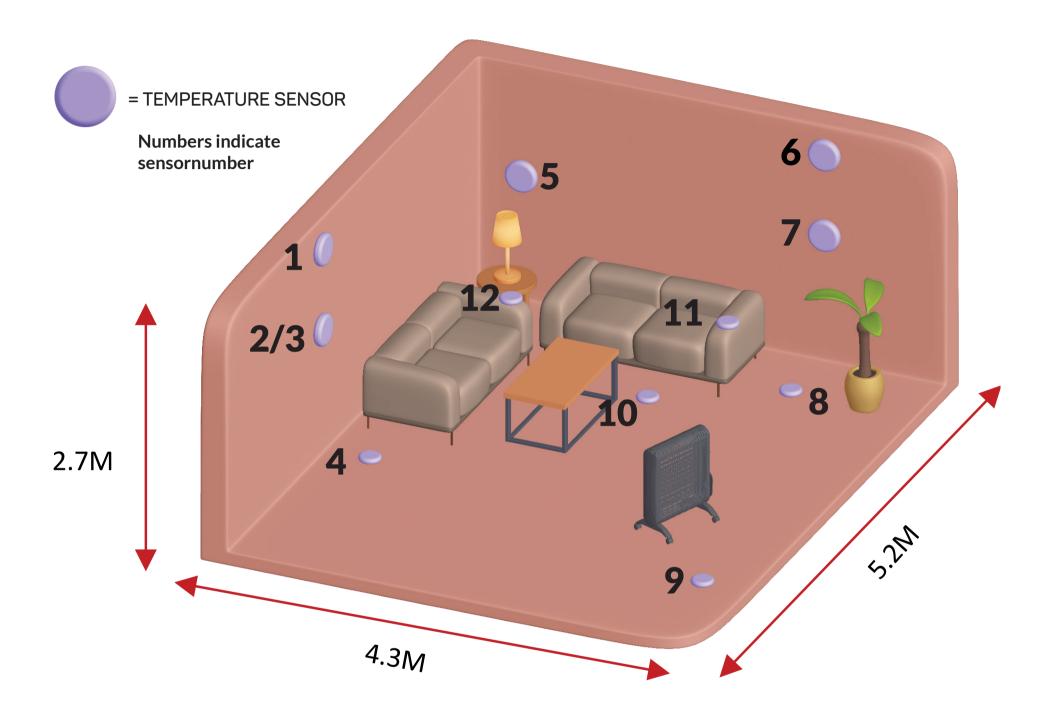

Test results

The numbers below show the temperature increase after 3 hours.

The average of the measurement points for floor, seated height, and wall & ceiling has been used as the differential value.

MEASUREMENTS	OIL HEATER	FREESTANDING PANEL HEATER	BOOSTER II	BOOSTER II H
WALL & CEILING	5.4 °C	6.4 °C	9.5 °C	9.5°C
FLOOR	3.6 °C	4.1°C	6.7 °C	6.5°C
SEATED HEIGHT	4.5 °C	5.7 °C	8.4 °C	8.6°C