

Alunette

LED | E27



AL250LED

Alunette LED- and E27 universal luminaire for both indoor and outdoor use in public and private applications. Luminaires can be used among others in staircases, kitchens, bathrooms, storage rooms, toilets, corridors, shelters and terraces.



“Universal luminaire
for every purpose.”



AL250LED + AL250KL-V



AL250LED + AL250K-V

Structure

- › Diffuser – UV and shock resistant acrylic
- › Body – UV resistant polycarbonate
- › LED-models CL2 and E27-base model CL1
- › LED-model:
 - Connected load 5W (AL250LED) and 6W (ALRD250LED), luminaire luminous flux 530 lm (4000 K) and 530 lm (3000 K), comparable to 2x9W TC-S
 - 4000 K, Ra>80, power factor 0,92
 - Ambient temperature – 20 °C - + 30 °C
 - LED-module lifespan 30 000 h (L70), T_a=25 °C

Control

- › ALR... -models are sensor luminaires equipped with high-frequency radar to detect motion (Radar unit)
- › Radar unit is located inside the luminaire and is not visible outside

Mounting

- › To the ceiling and to the wall
 - › Suitable for surface or recess mounting
 - › Recess mounting bracket included in the packing
 - › Recess depth 27 mm, recess hole ø 240 mm, diffuser diameter ø 255 mm
 - › Snap-in terminal block with through wiring
 - Basic models: 3x2,5 mm² (E27), 2x2,5 mm² (LED)
 - Sensor models: 5x2,5 mm² (E27), 3x2,5 mm² (LED)
 - › Sensor luminaire models see more accurate information at WEB-site
 - To the ceiling max. 4 meters height and to the wall max. 2,7 meters height
 - Suitable for stand-alone and master-slave installation
 - Maximum load behind one master is 300W (bulb) and 200W (fluorescent) or 100W (LED) including the master luminaire
- Slave luminaires from the Ensto basic luminaire range

Decorative frame

- › Model: ring frame
- › Material: aluminium
- › Standard colours: white, black and grey (RAL 9006)
- › Diameter: 340 mm




Decorative frame with eyelid

- › Model: so called frame with eyelid
- › Material: aluminium
- › Standard colours: white, black and grey (RAL 9006)
- › Diameter: 340 mm


E number	Type	Product name	Base	Additional information
Alunette LED				
41 031 90	AL250LED	AL250LED IP54 LED 6W/840	LED	
41 033 01	AL250LED3K	AL250LED3K IP54 LED 6W/830	LED	
Alunette LED radar luminaires				
41 032 81	ALR250LED	ALR250LED IP54 LED 7W/840 RAD	LED	
41 033 05	ALR250LED3K	ALR250LED3K IP54 LED 7W/830 RA	LED	
Alunette E27 base (light source is not included in the delivery)				
41 033 80	AL250	AL250 IP54 E27 AC 0	E27	



E number	Type	Product name	Base	Additional information
Decorative frame				
41 607 00	AL250K-V	AL250K-V FRAME WH		white
41 607 01	AL250K-M	AL250K-M FRAME BK		black
41 607 02	AL250K-H	AL250K-H FRAME GR		grey
Decorative frame with eyelid				
41 607 03	AL250KL-V	AL250KL-V FRAME WH		white
41 607 04	AL250KL-M	AL250KL-M FRAME BK		black
41 607 05	AL250KL-H	AL250KL-H FRAME GR		grey
Snow shield				
46 031 78	LS125P/1	LS125P/1 SNOW SHIELD WH		white

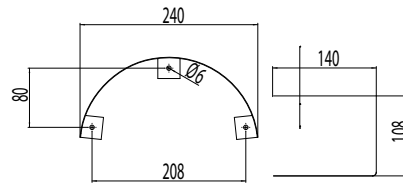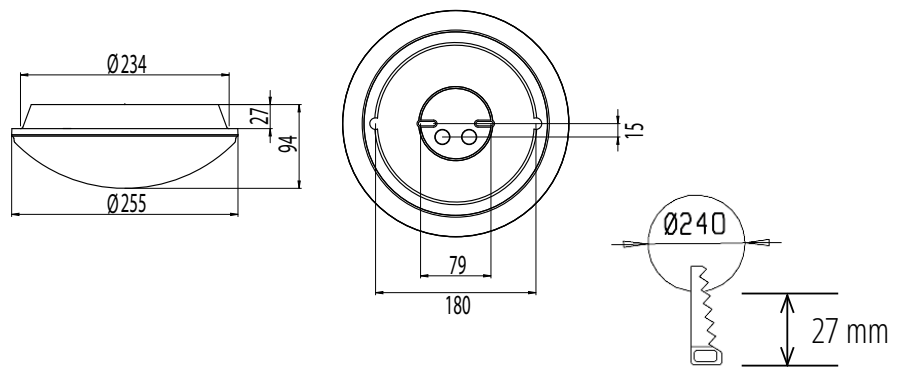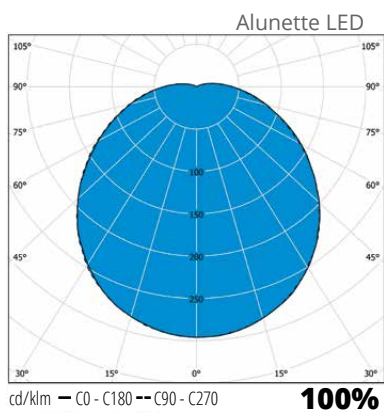

Snow shields LS125P/1

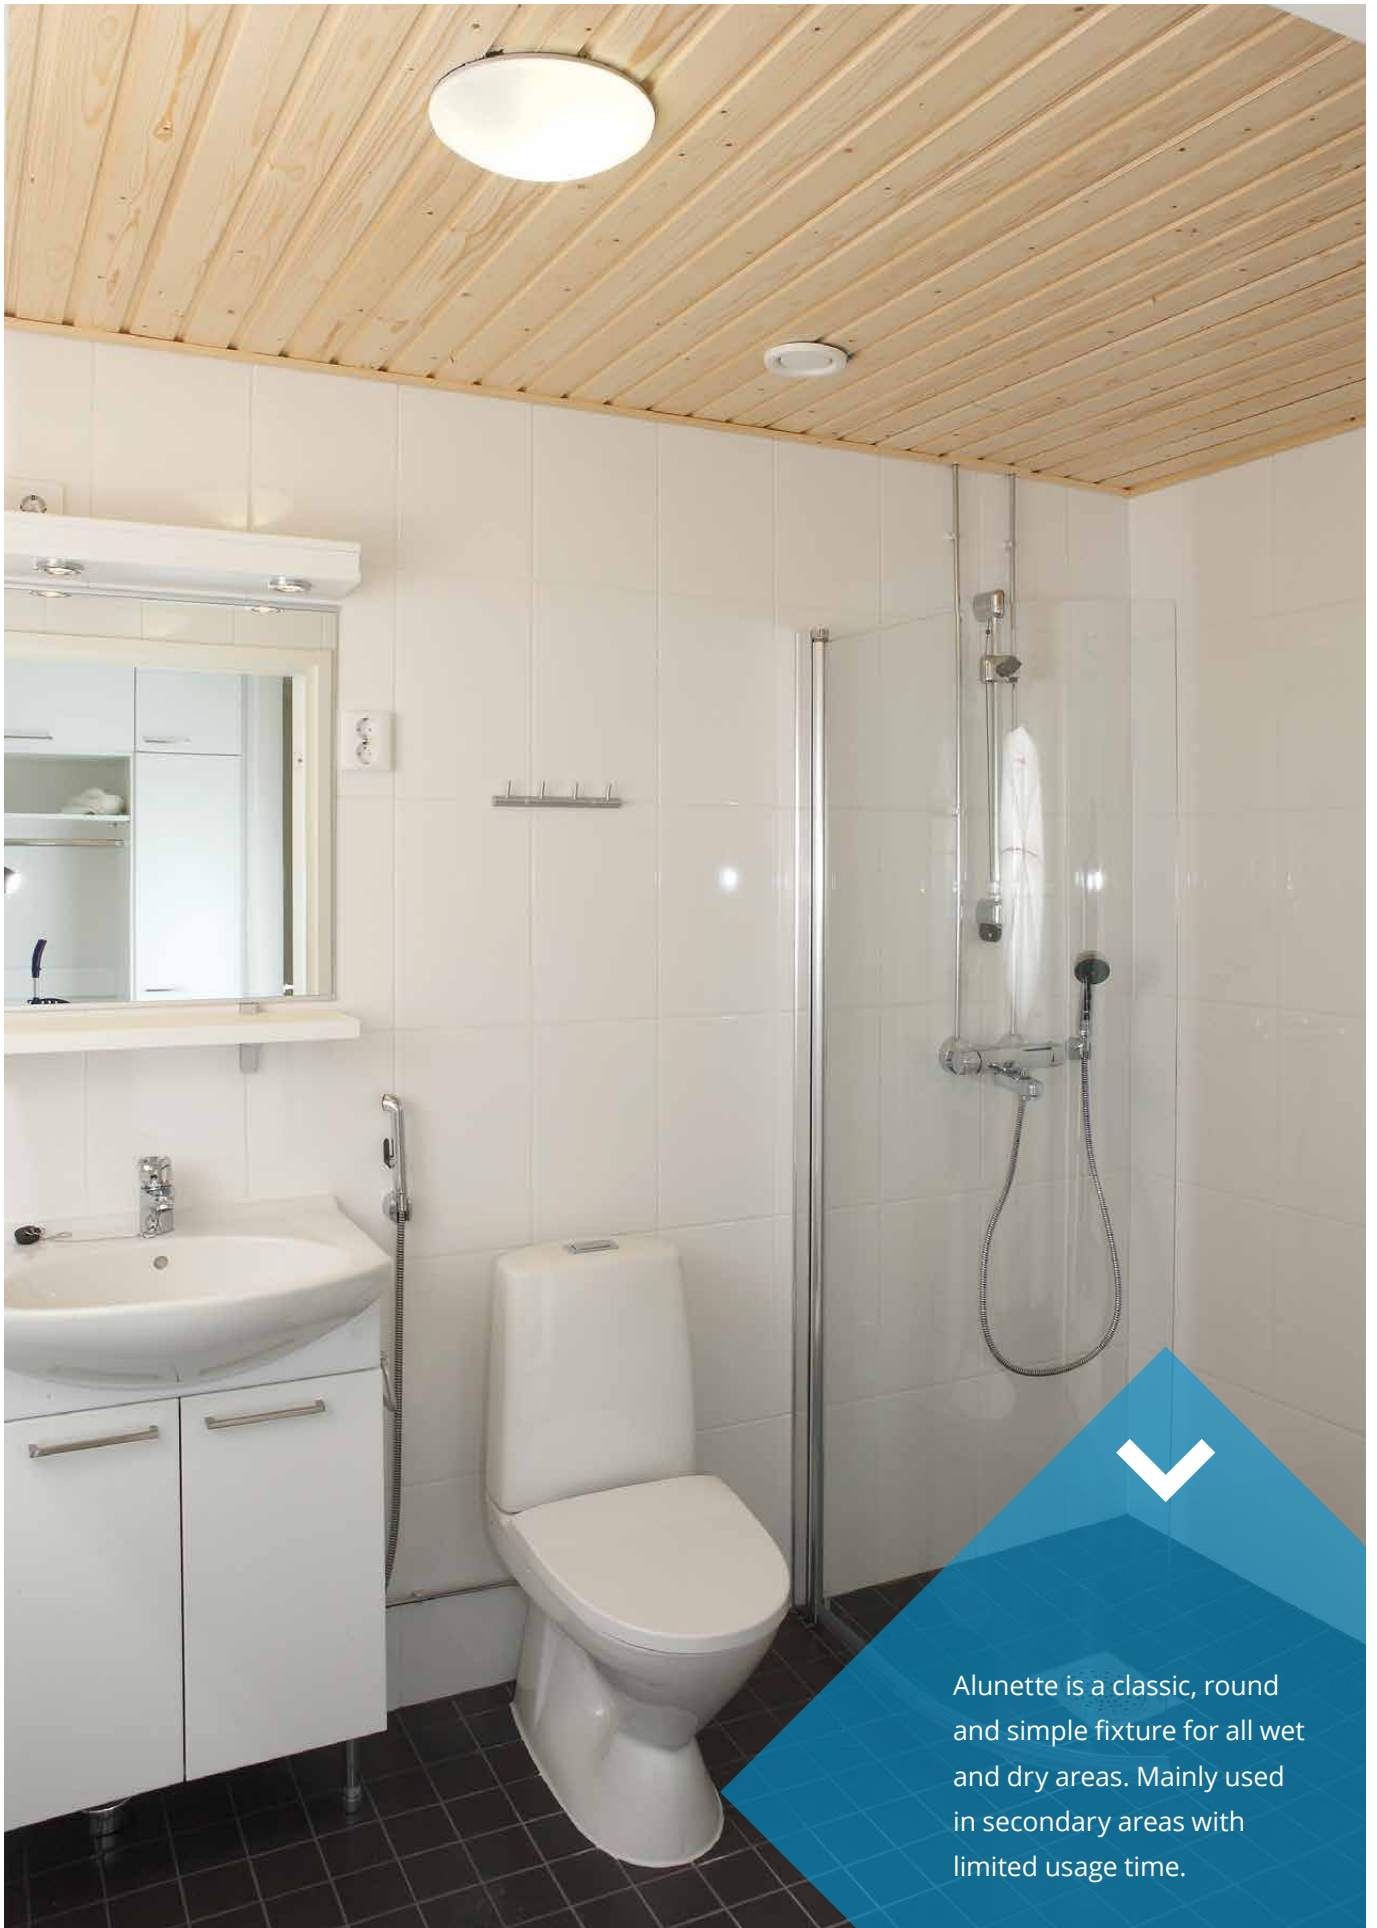

Alunette is a classic, round and simple fixture for all wet and dry areas. Mainly used in secondary areas with limited usage time.