



FixSun is a series of panels designed in Finland for challenging weather conditions. The new 5BB technology guarantees the most effective panels of the market, which are also able to make the most of the scattering on cloudy weather.


FXN-300P-60/5BB Polycrystalline 60 cells 280w-300w

1 *Reliable Quality*





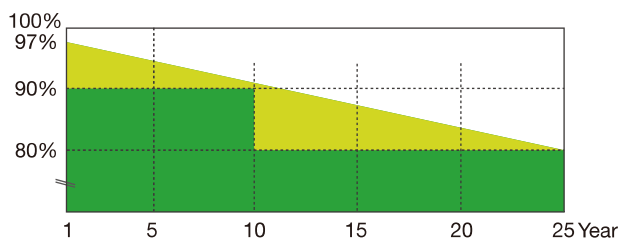

- Positive power tolerance: 0~+5W
- 100% EL double-inspection ensures modules are defects free
- Modules binned by current to improve system performance
- Potential Induced Degradation (PID) Resistant

2 *Superior Warranty*

- 25-year product warranty
- 25-year linear power output warranty



3 *Key features*

-  Polycrystalline modules designed for commercial and solar farm grid-tied applications
-  High power output and highest conversion efficiency
-  Anti-reflective and anti-soiling surface reduces power loss from dirt and dust
-  Outstanding performance in low-light irradiance environments
-  Excellent mechanical load resistance: Certified to withstand high wind loads (2400Pa) and snow loads (5400Pa)
-  High salt and ammonia resistance certified by TÜV NORD


Mechanical Parameters

Cell (mm)	Poly 156x156
Weight (kg)	18 (approx)
Glass Thickness	4/3.2mm
Dimensions (LxWxH) (mm)	1650x992x35
Cable Cross Section Size (mm ²)	4
No. of Cells and Connections	60x10
Junction Box	IP67, 3 diodes
Connector	MC4 Compatible
Packaging Configuration	30 Per Pallet

Working Conditions

Maximum System Voltage	DC 1000V (IEC)
Operating Temperature	-40°C ~ +85°C
Maximum Series Fuse	15A
Maximum Static Load, Front (e.g., snow and wind)	5400Pa (112 lb/ft ²)
Maximum Static Load, Back (e.g., wind)	2400Pa (50 lb/ft ²)
NOCT	45±2°C
Application Class	Class A

Engineering Drawings

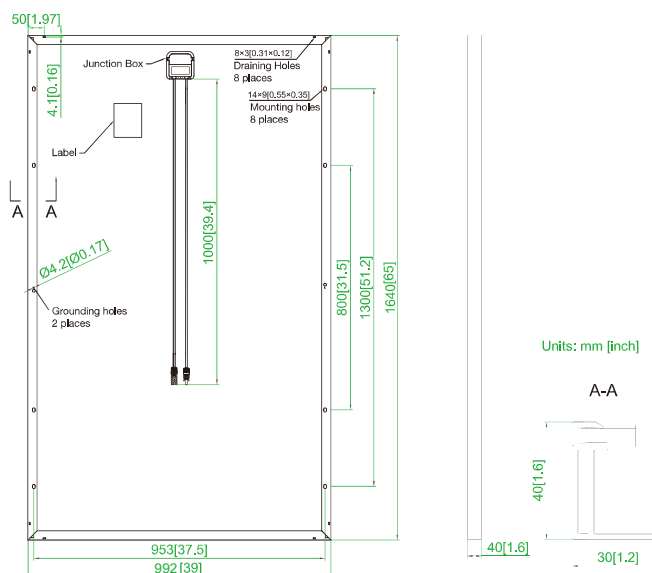

Electrical Parameters

Module	FXN280P-60	FXN285P-60	FXN290P-60	FXN295P-60	FXN300P-60
Rated Maximum Power at STC (W)	280	285	290	295	300
Open Circuit Voltage (Voc/V)	38.85	38.95	39.63	40.02	40.41
Maximum Power Voltage (Vmp/V)	31.88	32.18	32.56	32.90	33.24
Short Circuit Current (Isc/A)	9.33	9.43	9.56	9.63	9.70
Maximum Power Current (Imp/A)	8.78	8.85	8.91	8.97	9.03
Module Efficiency [%]	17.12	17.55	17.86	18.16	18.47
Power Tolerance (W)			-0~+5W		
Temperature Coefficient of Isc (αIsc)			+0.058%/°C		
Temperature Coefficient of Voc (βVoc)			-0.330%/°C		
Temperature Coefficient of Pmax (γPmp)			-0.410%/°C		
STC	Irradiance 1000W/m ² , Cell Temperature 25°C, Air Mass 1.5				

I-V Curve

