

ALESSIsense




by



Alessi Sense by Oras

INSTALLATION AND MAINTENANCE GUIDE










8710F

I (ISO 3822)
EN 15091
100 - 1000 kPa
0.07 l/s (300 kPa w/Controller)
200 kPa (0.1 l/s)
max. +70°C
IP 44
Lithium 2CR5 6 V

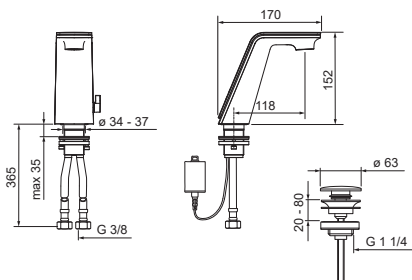

CE (EMC 2004/108/EY)



VTT-RTH-00006-16


§ 1596 KIWA Sverige 1913



static.oras.com/8710F

8712F

I (ISO 3822)
EN 15091
100 - 1000 kPa
0.07 l/s (300 kPa w/Controller)
200 kPa (0.1 l/s)
max. +70°C
IP 44
Lithium 2CR5 6 V,
AA 1.5 V Lithium x 2, CR 2450 3 V

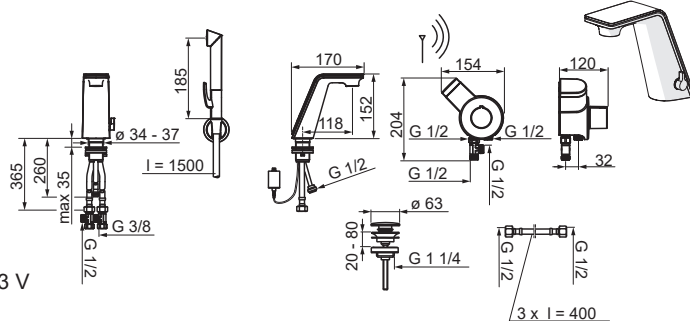


CE (EMC 2004/108/EY)

VTT-RTH-00006-16



§ 1596 KIWA Sverige 1913





static.oras.com/8712F

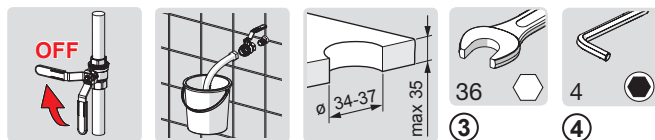




1

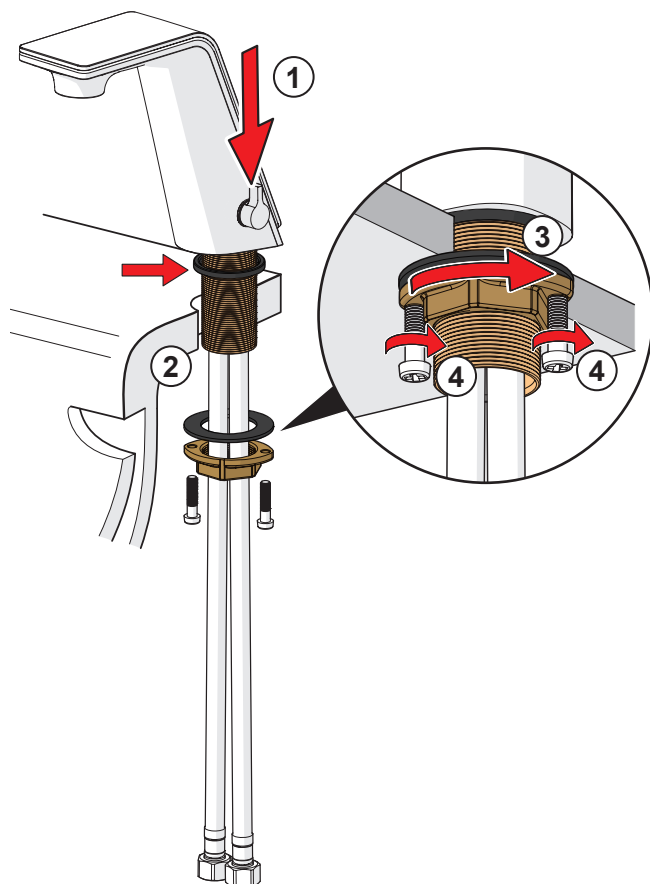




① ②




② 8710F

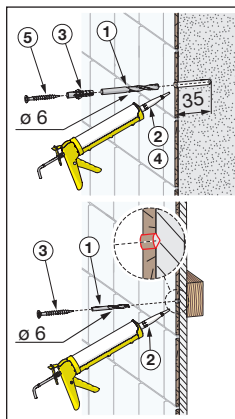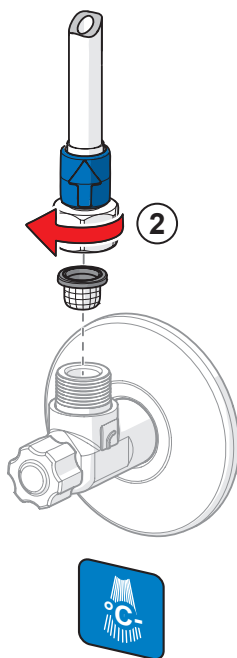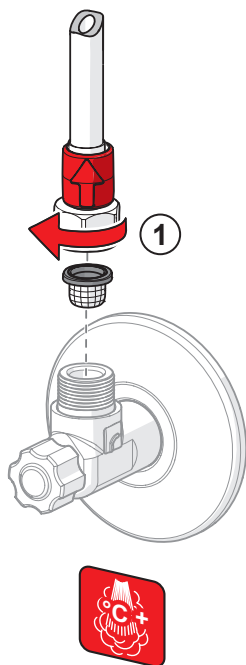




① ... ④





2 8712F

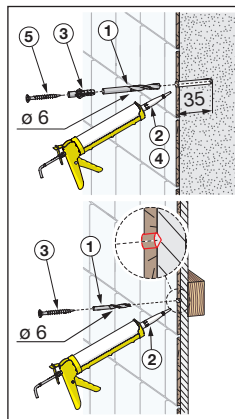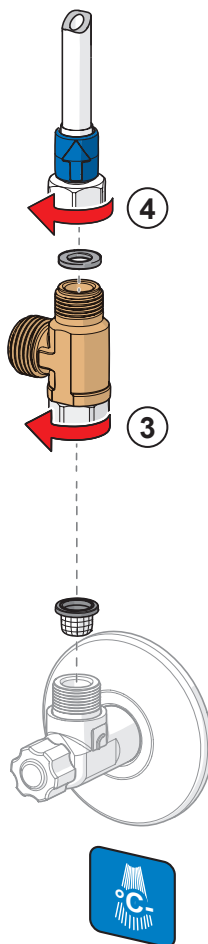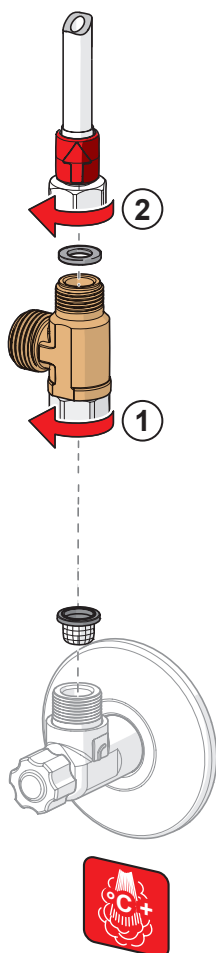




①

③ 8712F

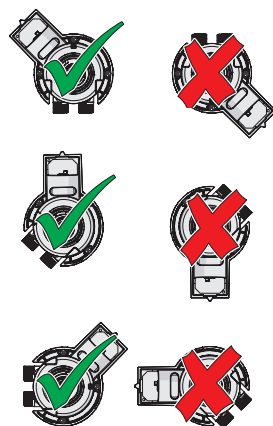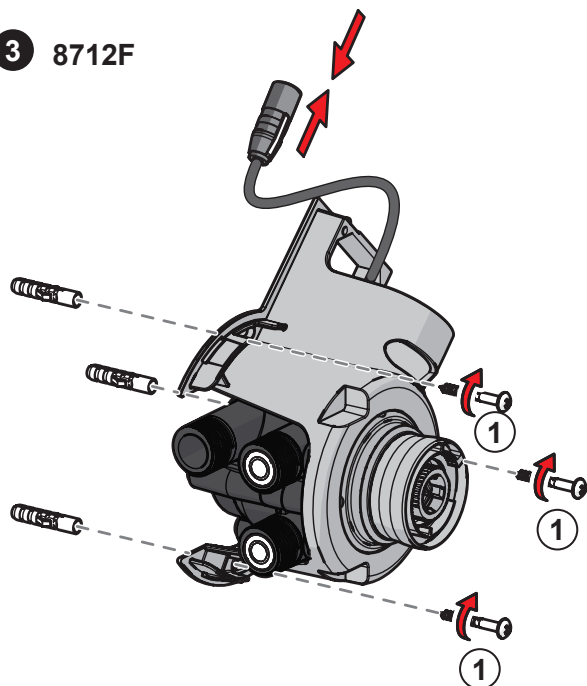



①




② ... ④ ④ ... ⑥
 ⑥ ... ⑨ ⑧



④ ... ⑥

⑧


4 8712F

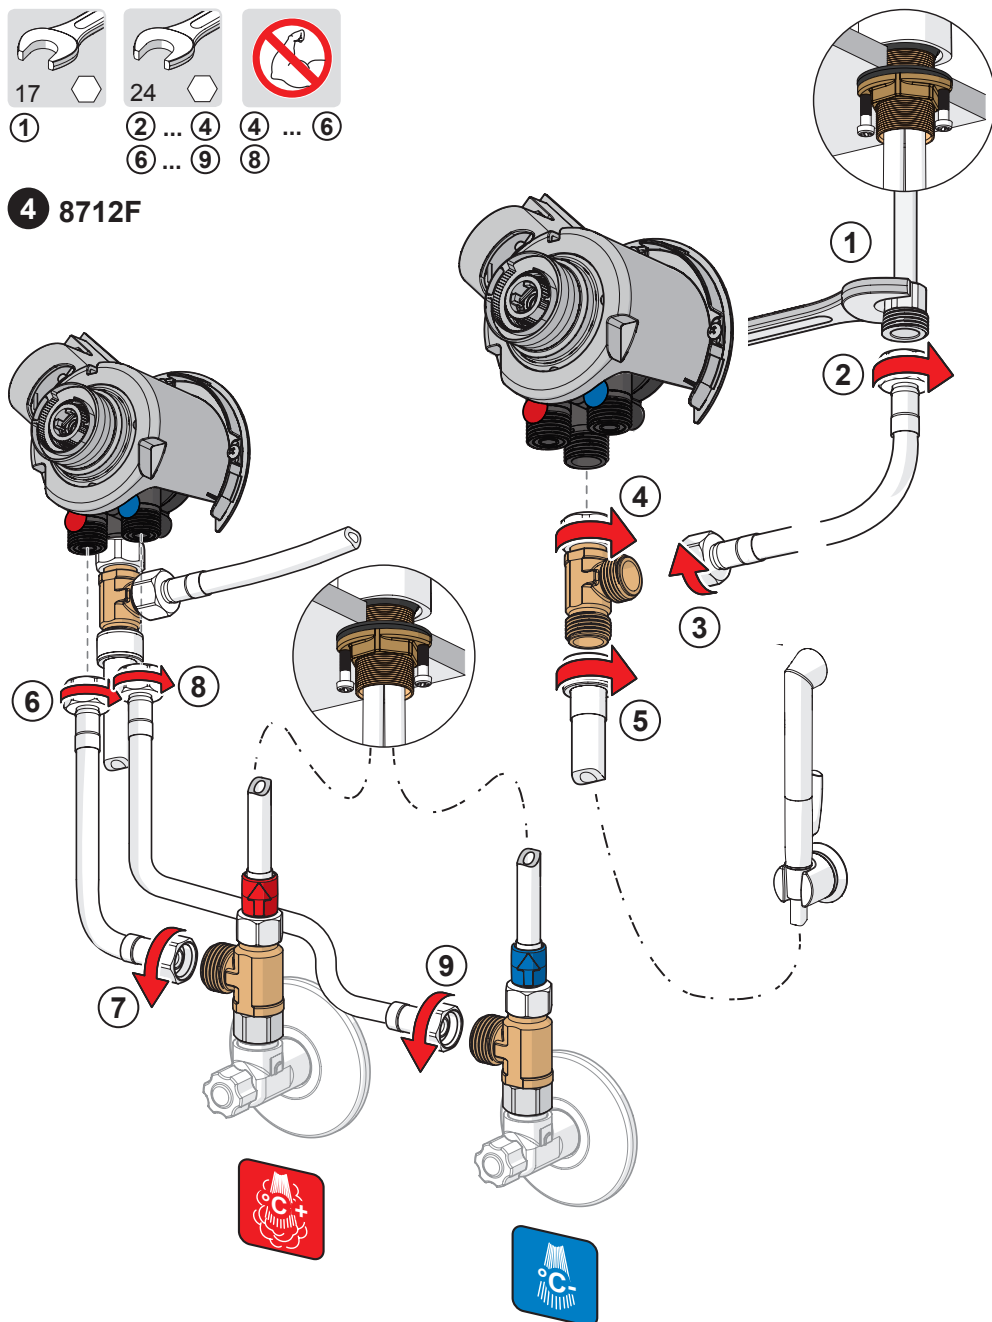




5 8712F


AA 1.5V x 2
Lithium

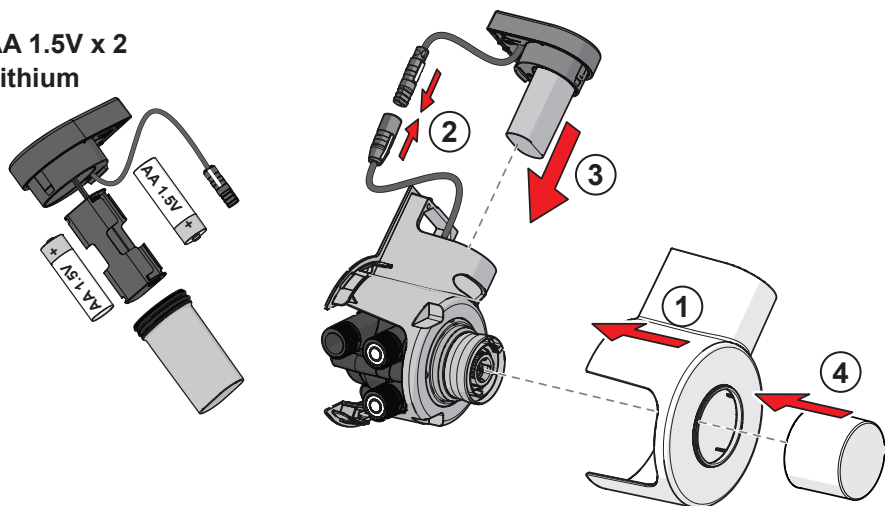



6

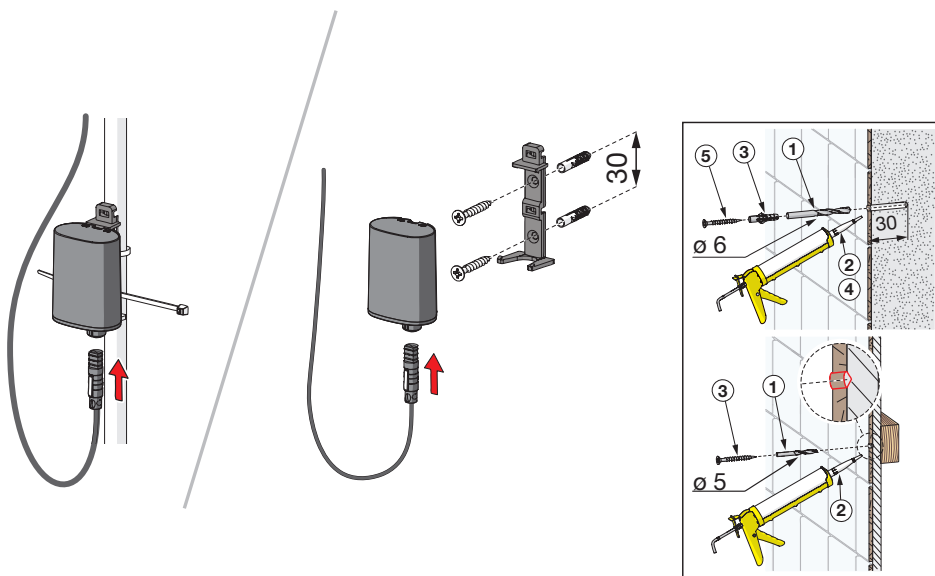

7




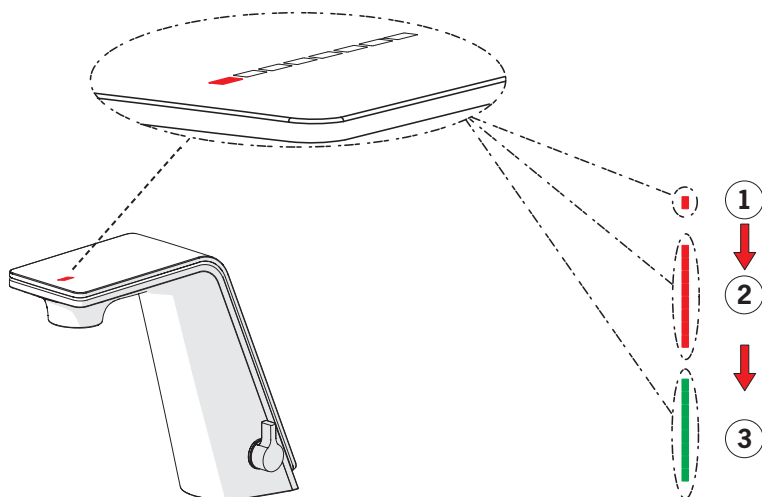


8 8712F

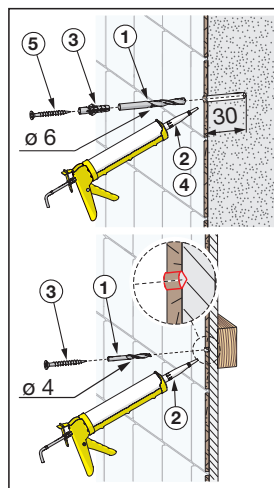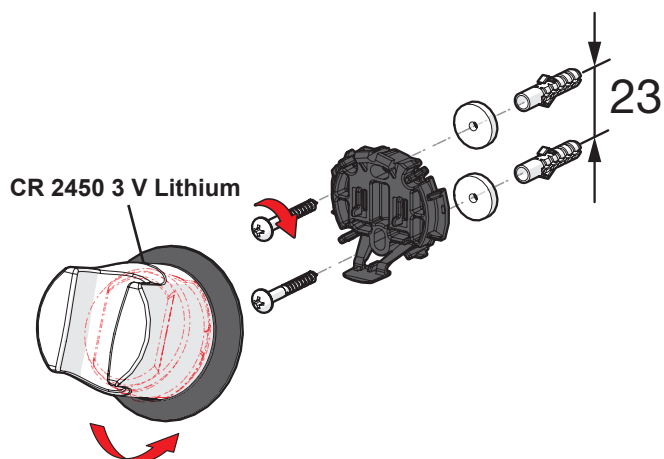



8712F

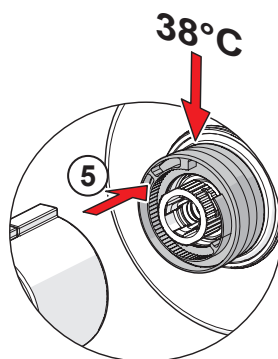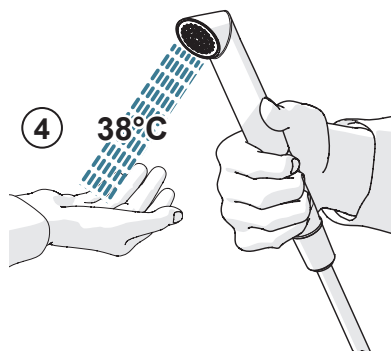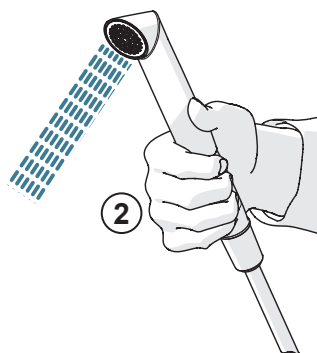
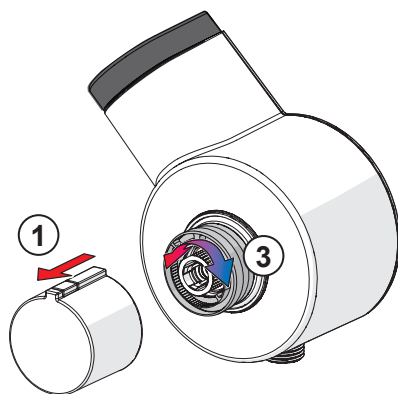







① ③



②

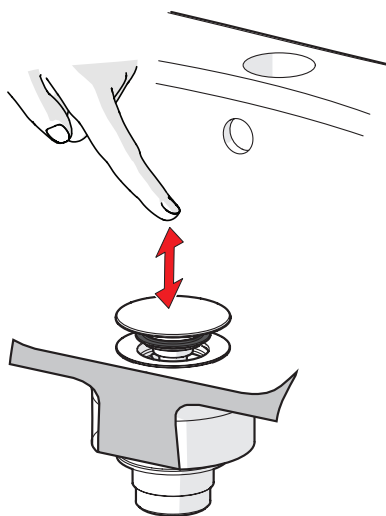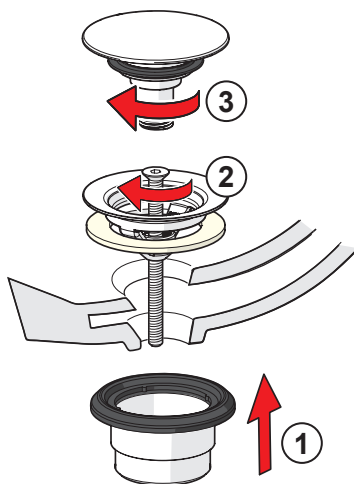


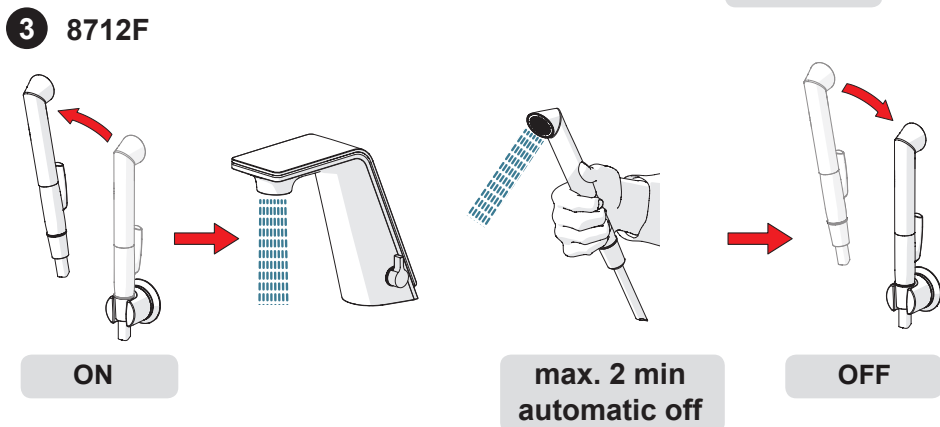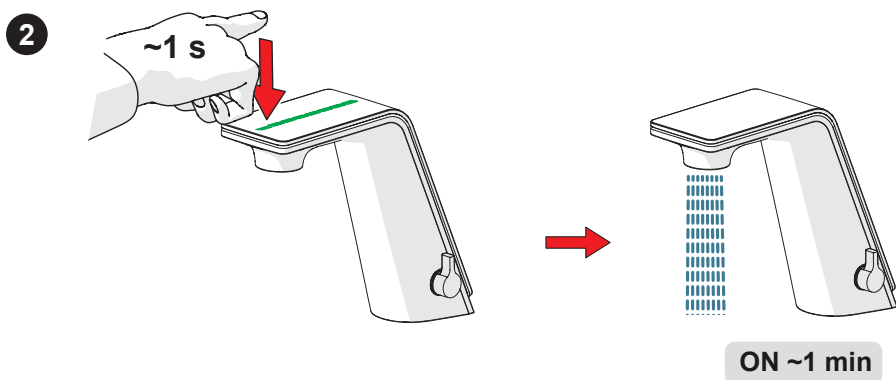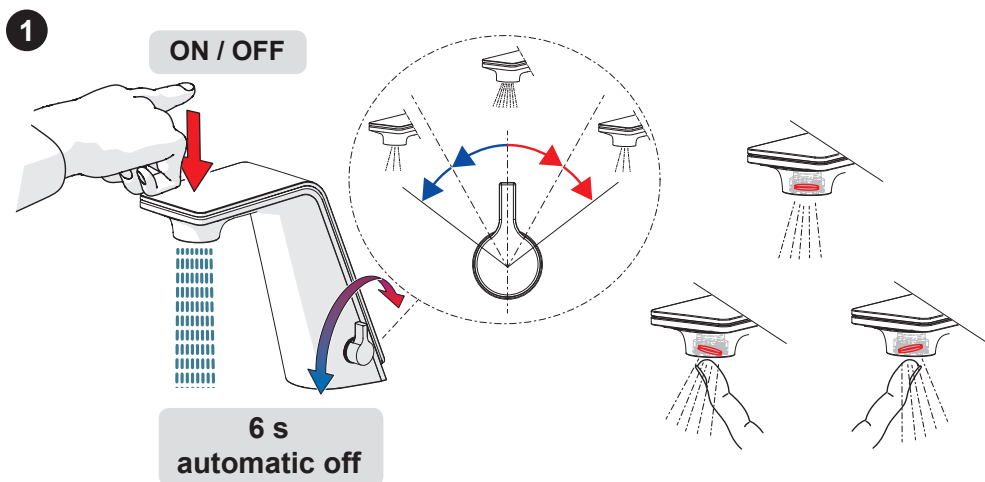


- 1) Short lights OFF
2) Short lights ON
3) Factory settings




Factory default	1 x	2 x	3 x	4 x	5 x	6 x	7 x	8 x
Max short flow (sec)	1 x	6	8	10	15	20	30	60
Max long flow (sec)	2 x	30	45	60	90	120	240	600
Automatic flush (h)	3 x	0	12	24	48	72	-	-
Automatic flush (sec)	4 x	10	30	60	120	180	240	600
Operation mode	5 x	OFF ⁽¹⁾	ON ⁽²⁾	-	-	-	-	-

Example 1: Max short flow 6 s → 30 s

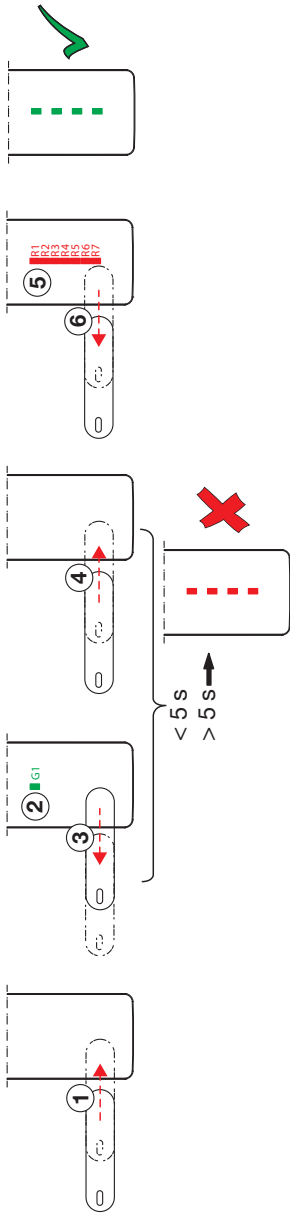

Example 2: Operation mode → FS = factory settings

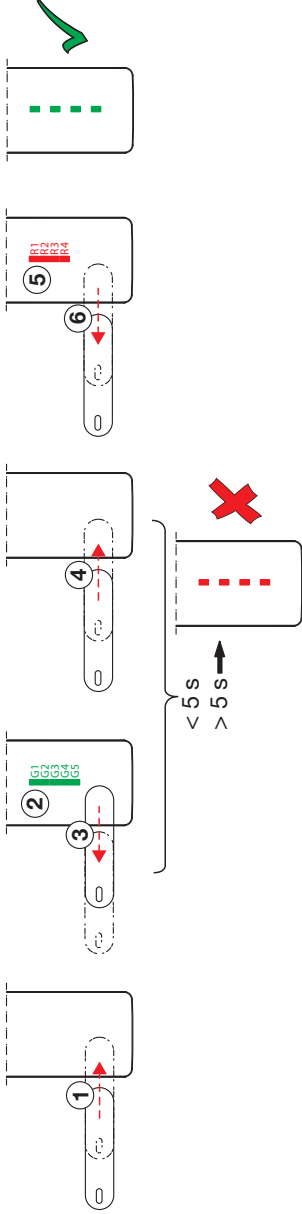


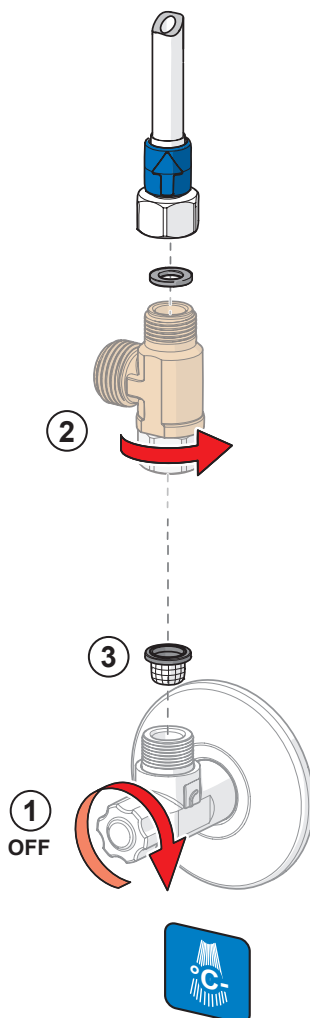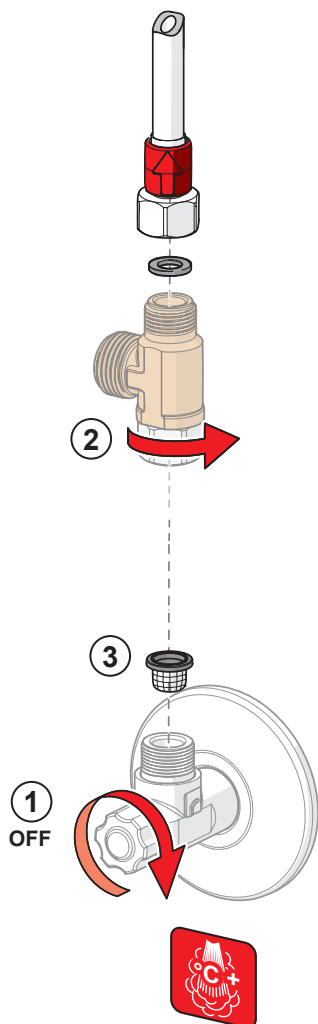




①

1

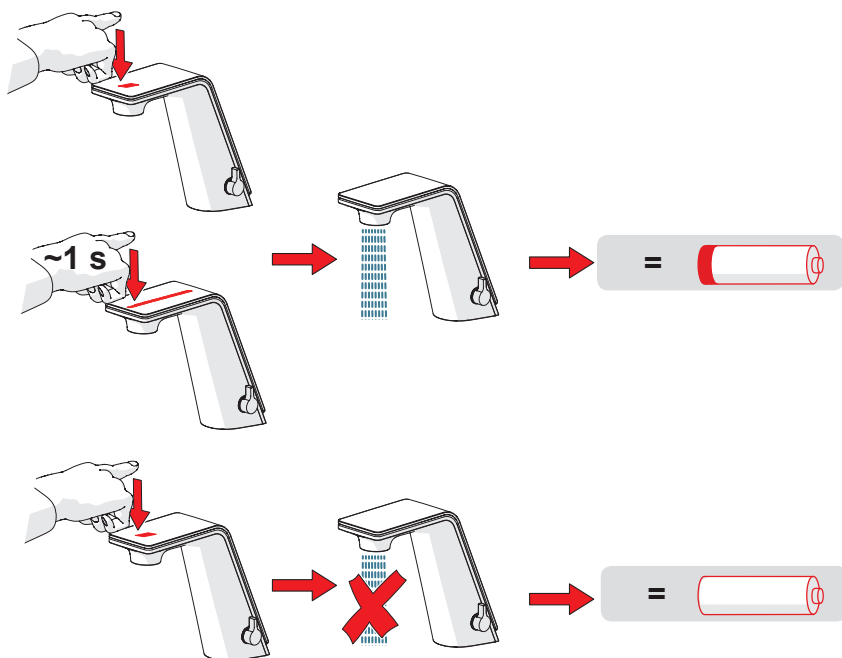

2

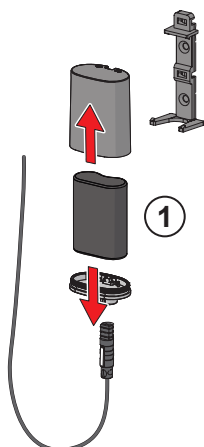




Lithium
CR2450 3 V




④

1 8712F

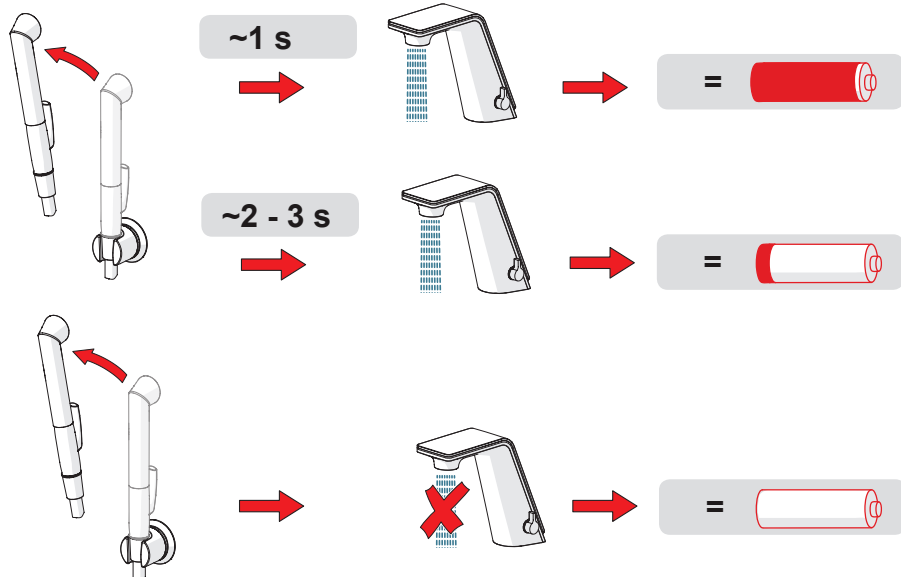


2

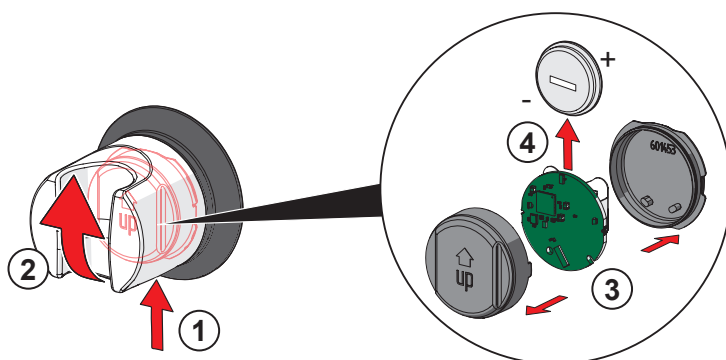










②

1 8712F

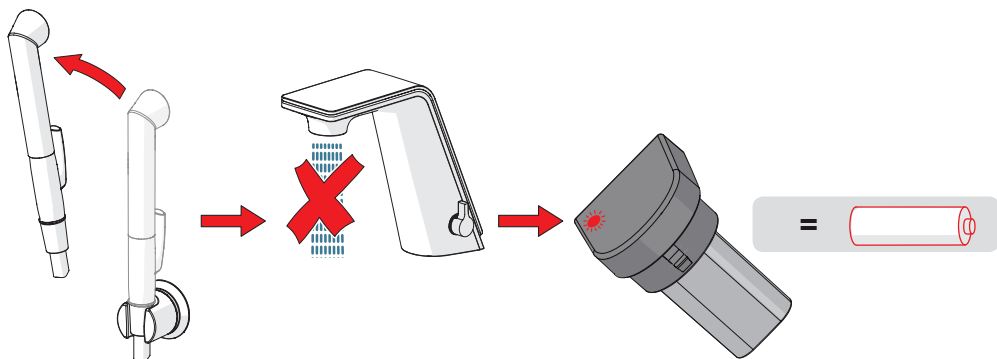

2

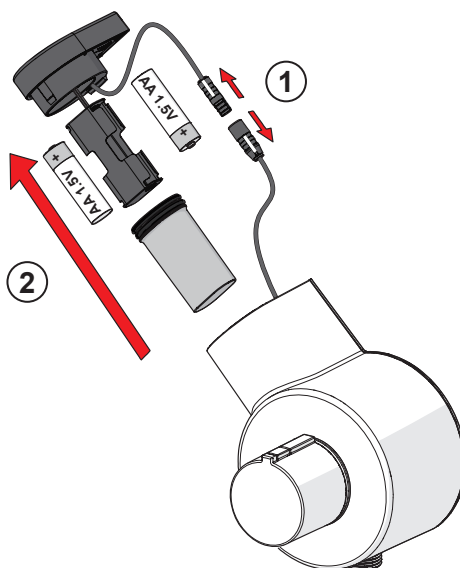


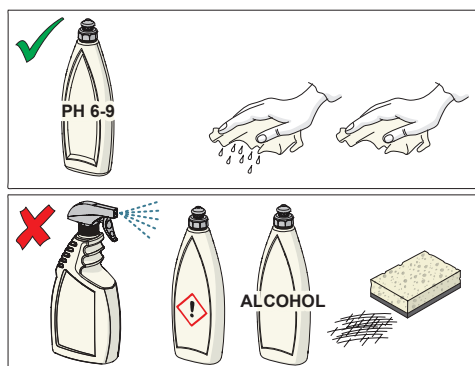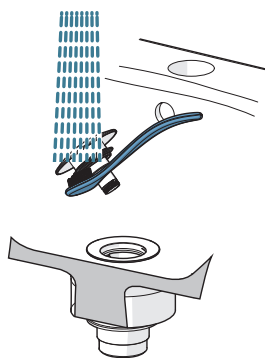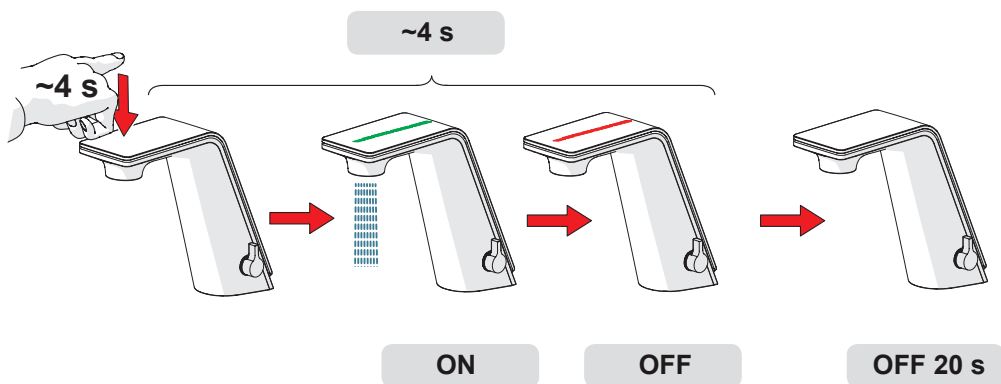

CLEANING.ORAS.COM


8710F

- 1 601697V
- 2 601711V
- 3 601709V
- 4 601707V
- 5 601920V
- 6 859114V
- 7 199417V
- 8 198330
- 9 159056V
- N.I. 602708V

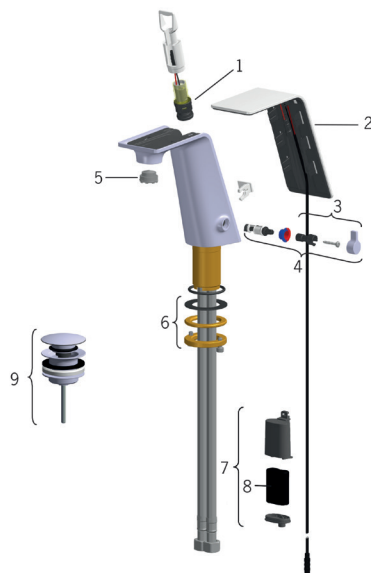

8712F

- 1 601697V
- 2 601711V
- 3 601709V
- 4 601707V
- 5 601920V
- 6 859114V
- 7 199417V
- 8 198330
- 9 159684
- 10 159048V
- 11 178780V
- 12 178796V
- 13 601307V
- 14 601512V
- 15 601590V
- 16 601616V
- 17 601468V
- 18 159056V
- 19 600599V
- N.I. 602708V

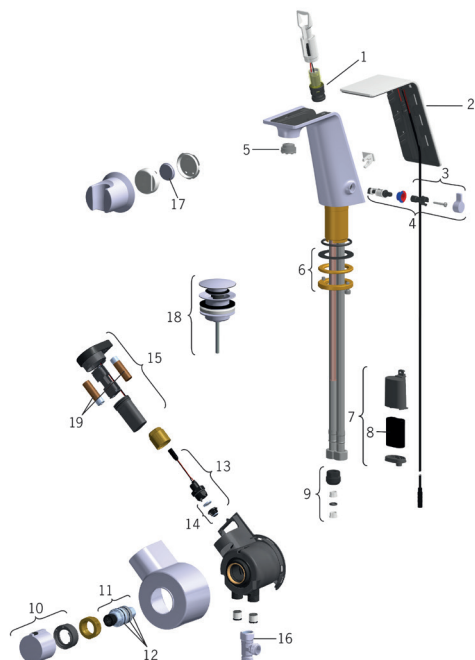

Oras Group is a powerful European provider of sanitary fittings: the market leader in the Nordics and a leading company in Continental Europe. The company's mission is to make the use of water easy and sustainable and its vision is to become the European leader of advanced sanitary fittings. Oras Group has two strong brands, Oras and Hansa.

The head office of the Group is located in Rauma, Finland, and the Group has four manufacturing sites: Burglengenfeld (Germany), Kralovice (Czech Republic), Olesno (Poland) and Rauma (Finland). Oras Group employs approximately 1400 people in twenty countries. Oras Group is owned by Oras Invest, a family company and an industrial owner.

ORAS GROUP
Isometsäntie 2, P.O. Box 40
FI-26101 Rauma
Tel. +358 2 83 161
Fax +358 2 831 6300
info.finland@oras.com
www.oras.com

