


TORRE RING CCT

SLI003027CCT_PW

LED luminaire TORRE RING CCT with the possibility of changing the light color (CCT), with a power of 9 W, high light efficacy 111 lm/W. Thanks to the ability to change the color temperature (CCT) in the range 3000/4000/6000K, we can adjust the light color depending on our needs and preferences. It has a high IP54 rating, making it ideal for use in rooms with high humidity. The CCT function allows you to changes to the colour temperature of light (3000/4000/6000K). Narrow beam angle 30° gives directional light so that selected surfaces can be better exposed. Designed for surface mounting.

CCT

IP54

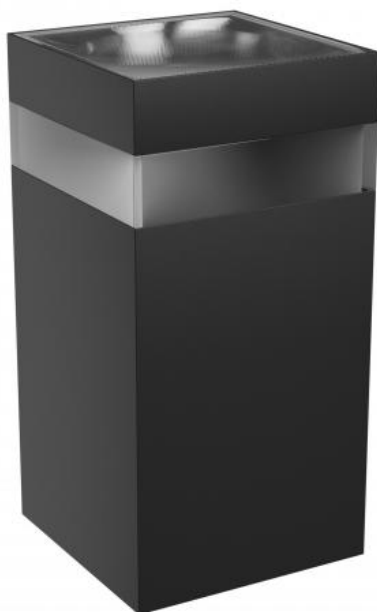


Power	9 W
Luminous flux*	1000 lm (360°)
Colour of light	CCT
Degree of protection (IP)	IP54

Voltage	230 V
Colour temperature	3000/4000/6000 K
Beam angle	30 °

Technical data

Code	SLI003027CCT_PW
Power	9 W
Nominal current	65 mA
Voltage	230 V
Energy consumption	9 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power factor	0.5
Useful luminous flux*	1000 lm (360°)
Luminous flux**	700 lm (360°)
Lamp efficacy	111 lm/W
Colour temperature	3000/4000/6000 K
Colour of light	CCT
Beam angle	30 °
RA	80
Light source included	+
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	Plastic
Degree of protection (IP)	IP54
Colour	Black
Dimension (AxBxC)	99x78x156 mm
For use	Inside/Outside
Assembly method	On the ceiling
Application	INT/EXT
Made in	PRC
Other	Light color change function 3000K/4000K/6000K ,

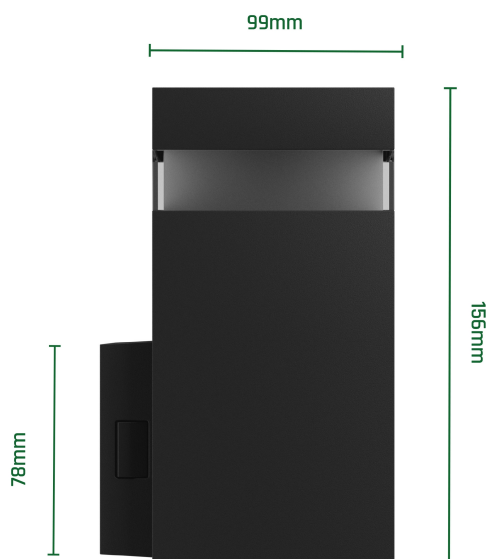

Related documents



 User manual



 Declaration of Conformity



 Photometric file

