


# NYMPHEA BLACK & WHITE CCT

SLI031035CCT\_PW

LED luminaire NYMPHEA BLACK & WHITE CCT with the possibility of changing the light color (CCT), with a power of 24 W, high light efficacy 130 lm/W. Thanks to the ability to change the color temperature (CCT) in the range 3000/4000/6000K, we can adjust the light color depending on our needs and preferences. It has a high IP54 rating, making it ideal for use in rooms with high humidity. The CCT function allows you to changes to the colour temperature of light (3000/4000/6000K). Designed for surface mounting. The product is certified by the National Institute of Hygiene, so it can be used in rooms with high hygienic requirements.

CCT


IP54

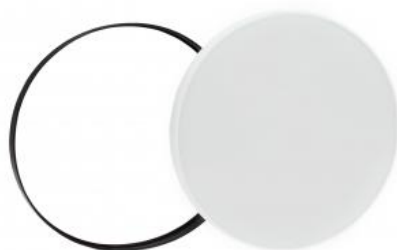

|                           |                       |                    |                         |
|---------------------------|-----------------------|--------------------|-------------------------|
| Power                     | <b>24 W</b>           | Voltage            | <b>230 V</b>            |
| Luminous flux*            | <b>3150 lm (360°)</b> | Colour temperature | <b>3000/4000/6000 K</b> |
| Colour of light           | <b>CCT</b>            | Beam angle         | <b>115 °</b>            |
| Degree of protection (IP) | <b>IP54</b>           |                    |                         |

## Technical data

|                              |                                                    |
|------------------------------|----------------------------------------------------|
| Code                         | SLI031035CCT_PW                                    |
| Power                        | 24 W                                               |
| Nominal current              | 160 mA                                             |
| Voltage                      | 230 V                                              |
| Energy consumption           | 24 kWh/1000h                                       |
| Frequency                    | 50HZ Hz                                            |
| Protection class             | II                                                 |
| Power supply included        | +                                                  |
| Power factor                 | 0.6                                                |
| Useful luminous flux*        | 3150 lm (360°)                                     |
| Luminous flux**              | 1920 lm (360°)                                     |
| Lamp efficacy                | 130 lm/W                                           |
| Colour temperature           | 3000/4000/6000 K                                   |
| Colour of light              | CCT                                                |
| Beam angle                   | 115 °                                              |
| RA                           | >80                                                |
| Light source included        | +                                                  |
| Uniformity of color SDCM max | 5                                                  |
| Dimmable                     | No                                                 |
| Working temperature range    | -20 +40 °                                          |
| Lifespan                     | 17000 h                                            |
| Housing material             | Plastic                                            |
| Degree of protection (IP)    | IP54                                               |
| Colour                       | White                                              |
| Dimension (AxBxC)            | 320x52 mm                                          |
| For use                      | Inside                                             |
| Assembly method              | On the ceiling                                     |
| Application                  | Inside                                             |
| Made in                      | PRC                                                |
| Other                        | Light color change function<br>3000K/4000K/6000K , |

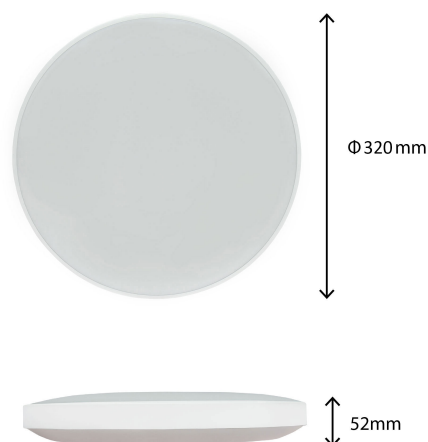

## Related documents



 User manual



 Declaration of Conformity

