

# ANDROMEDA PRIME

SLI033038CCT\_PW

On track luminaire ANDROMEDA PRIME with the possibility of changing the light color (CCT), with a power of 16 W, high light efficacy 109 lm/W. Thanks to the ability to change the color temperature (CCT) in the range 2700/4000/6000K, we can adjust the light color depending on our needs and preferences. Narrow beam angle 25° gives directional light so that selected objects or surfaces can be better exposed. Designed to be mounted on a track.


CCT



|                           |                       |                    |                         |
|---------------------------|-----------------------|--------------------|-------------------------|
| Power                     | <b>16 W</b>           | Voltage            | <b>230 V</b>            |
| Luminous flux*            | <b>1750 lm (360°)</b> | Colour temperature | <b>2700/4000/6000 K</b> |
| Colour of light           | <b>CCT</b>            | Beam angle         | <b>25 °</b>             |
| Degree of protection (IP) | <b>IP20</b>           |                    |                         |

## Technical data

|                              |                                                    |
|------------------------------|----------------------------------------------------|
| Code                         | SLI033038CCT_PW                                    |
| Power                        | 16 W                                               |
| Nominal current              | 120 mA                                             |
| Voltage                      | 230 V                                              |
| Energy consumption           | 16 kWh/1000h                                       |
| Frequency                    | 50HZ Hz                                            |
| Protection class             | I                                                  |
| Power factor                 | 0.5                                                |
| Useful luminous flux*        | 1750 lm (360°)                                     |
| Luminous flux**              | 1200 lm (360°)                                     |
| Lamp efficacy                | 109 lm/W                                           |
| Luminous intensity           | 5900 cd                                            |
| Colour temperature           | 2700/4000/6000 K                                   |
| Colour of light              | CCT                                                |
| Beam angle                   | 25 °                                               |
| RA                           | 80                                                 |
| Light source included        | Yes                                                |
| Uniformity of color SDCM max | 5                                                  |
| Dimmable                     | No                                                 |
| Working temperature range    | -20/+40 °                                          |
| Lifespan                     | 17000 h                                            |
| Housing material             | Aluminum, PLASTIC                                  |
| Degree of protection (IP)    | IP20                                               |
| Colour                       | White                                              |
| Dimension (AxBxC)            | 63x134x184 mm                                      |
| For use                      | Inside/Outside                                     |
| Assembly method              | on track                                           |
| Application                  | Inside                                             |
| Made in                      | PRC                                                |
| Other                        | Light color change function<br>2700K/4000K/6000K , |

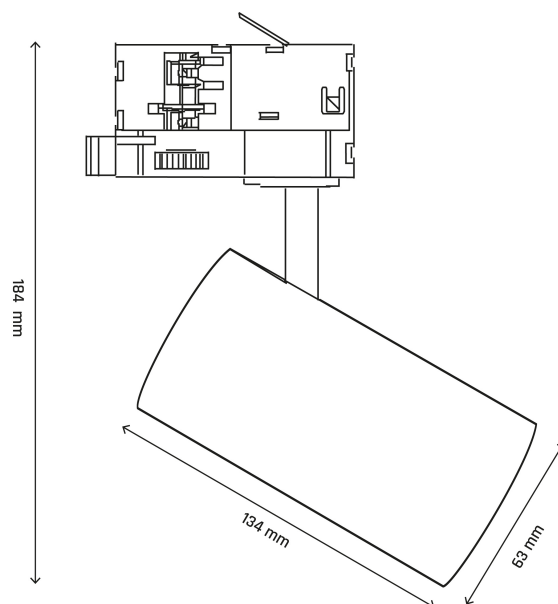

## Related documents

 User manual Declaration of Conformity Photometric file 3D model

