


SLI035078NW_PW

SLI035078NW_PW

LED luminaire, with a power of 40 W, high light efficacy 125 lm/W. It is made of high-quality components, supported by a 5-year warranty. Lights up with neutral light - the most universal colour (4000K), which is suitable for the rooms we use on a daily basis, ensuring comfort during everyday activities. Suitable for both surface and recessed mounting. The product is certified by the National Institute of Hygiene, so it can be used in rooms with high hygienic requirements.

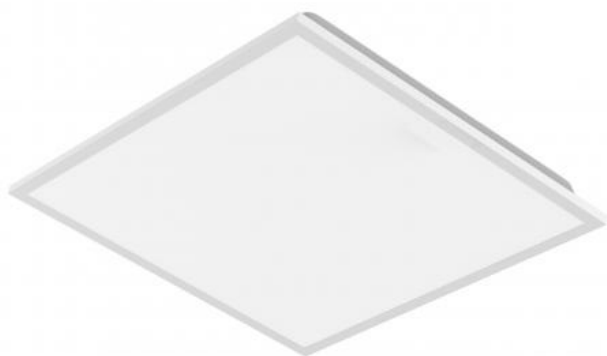

Power	40 W	Voltage	230 V
Luminous flux*	5000 lm (360°)	Colour temperature	4000 K
Colour of light	Neutral white	Beam angle	120 °
Degree of protection (IP)	IP20		

Technical data

Code	SLI035078NW_PW
Power	40 W
Nominal current	175 mA
Voltage	230 V
Energy consumption	40 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	+
Manufacturer of power supply	SPECTRUM
Power factor	0.9
Useful luminous flux*	5000 lm (360°)
Luminous flux**	4600 lm (360°)
Lamp efficacy	125 lm/W
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	120 °
RA	>80
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	50000 h
Housing material	Steel/PS
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	595x595x33 mm
Mounting hole	575x575 mm
For use	Inside
Assembly method	On the ceiling, Recessed
Application	INT
Made in	PRC

Related documents



 User manual



 Declaration of Conformity



 Photometric file